

Industrial Automation

(Automação de Processos Industriais)


Analysis of Discrete Event Systems

Running a Petri net with I/O

<http://users.isr.ist.utl.pt/~jag/courses/api1718/api1718.html>

Prof. José Gaspar, rev. 2017/2018

Running a Petri net with HW inputs and outputs

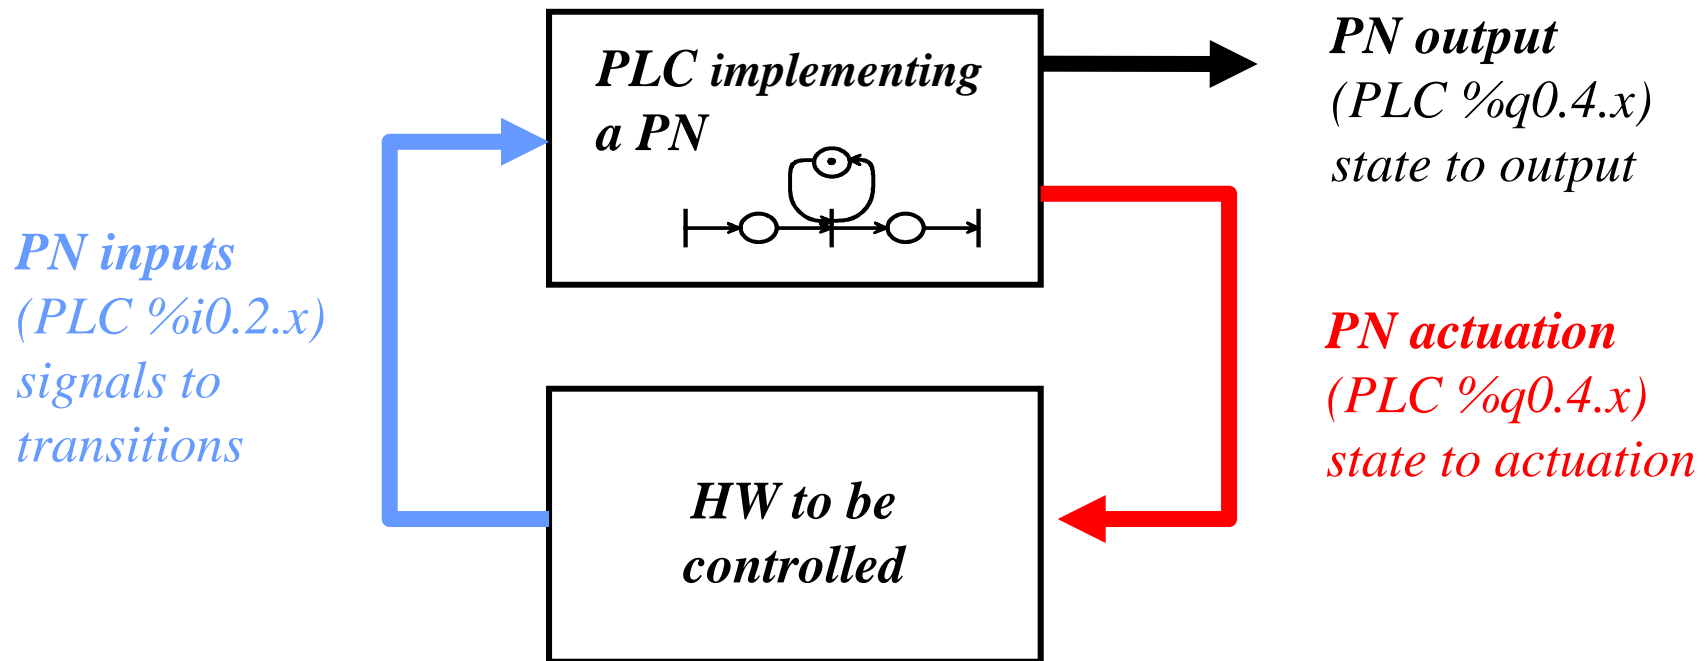

Main systems:

- (a) Petri net, run in PC or PLC
- (b) Hardware to be controlled



Interface functions, run in PC or PLC:

- (1) state/places to actuation,
- (2) signals to transitions,
- (3) state/places to output

Example 1: Philosophers Dinner


This PN has inputs "Philosopher i wants to eat".

tfire
wants
to eat

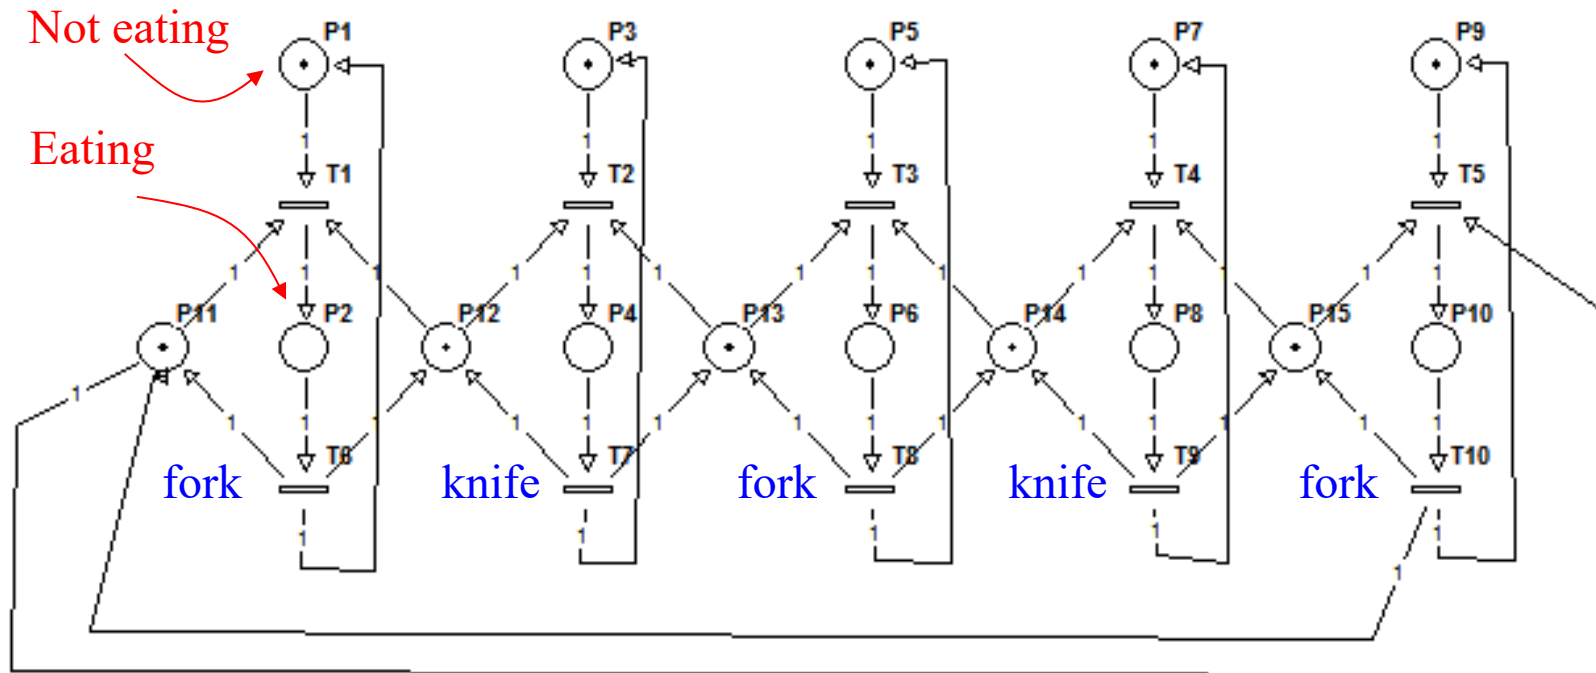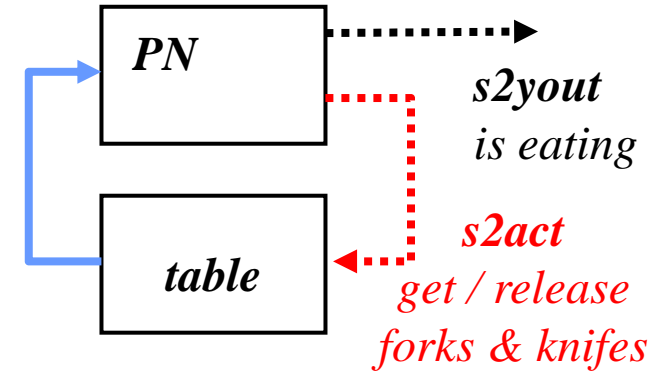

Philosopher1, Philosopher2, Philosopher3, Philosopher4, Philosopher5

Example: Philosophers Dinner – input / events

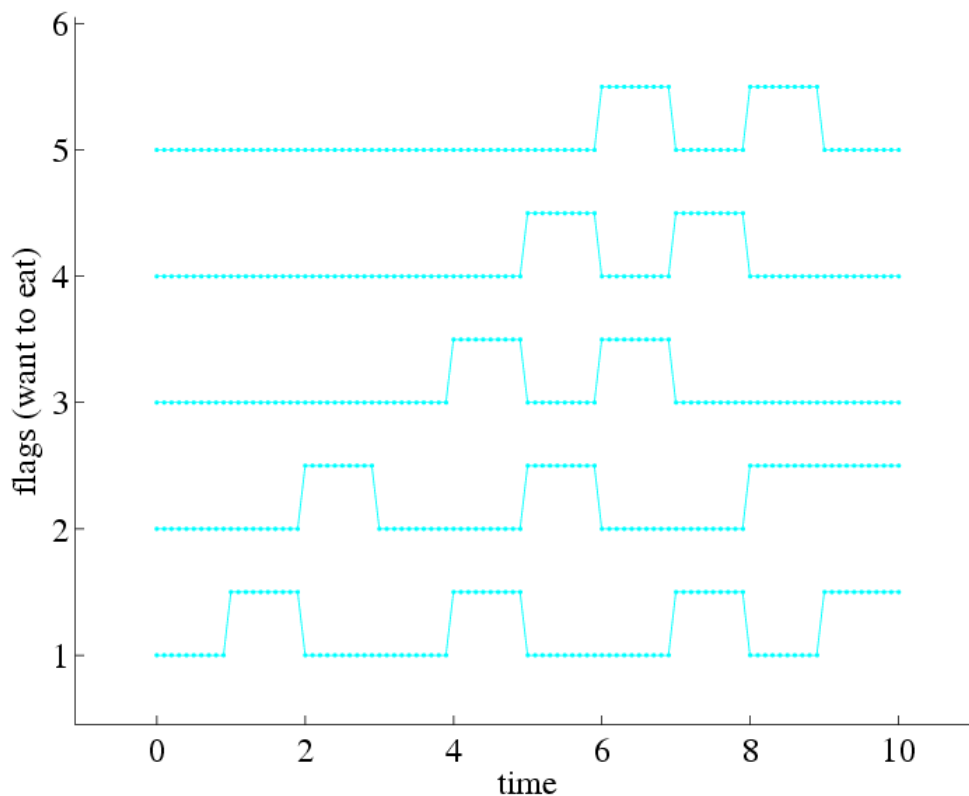


```

% first column = time in seconds
% next 5 columns = want to eat flags at time t
%
tu= [...
  0.0  want_to_eat( [] ) ; ...
  1.0  want_to_eat( 1 ) ; ...
  2.0  want_to_eat( 2 ) ; ...
  3.0  want_to_eat( [] ) ; ...
  4.0  want_to_eat( [1 3] ) ; ...
  5.0  want_to_eat( [2 4] ) ; ...
  6.0  want_to_eat( [3 5] ) ; ...
  7.0  want_to_eat( [4 1] ) ; ...
  8.0  want_to_eat( [5 2] ) ; ...
  9.0  want_to_eat( [1 2] ) ; ...
];

function y= want_to_eat(kid)
y= zeros(1,5);
for i=1:length(kid)
    y(kid(i))= 1;
end

```

Example: Philosophers Dinner – simulation

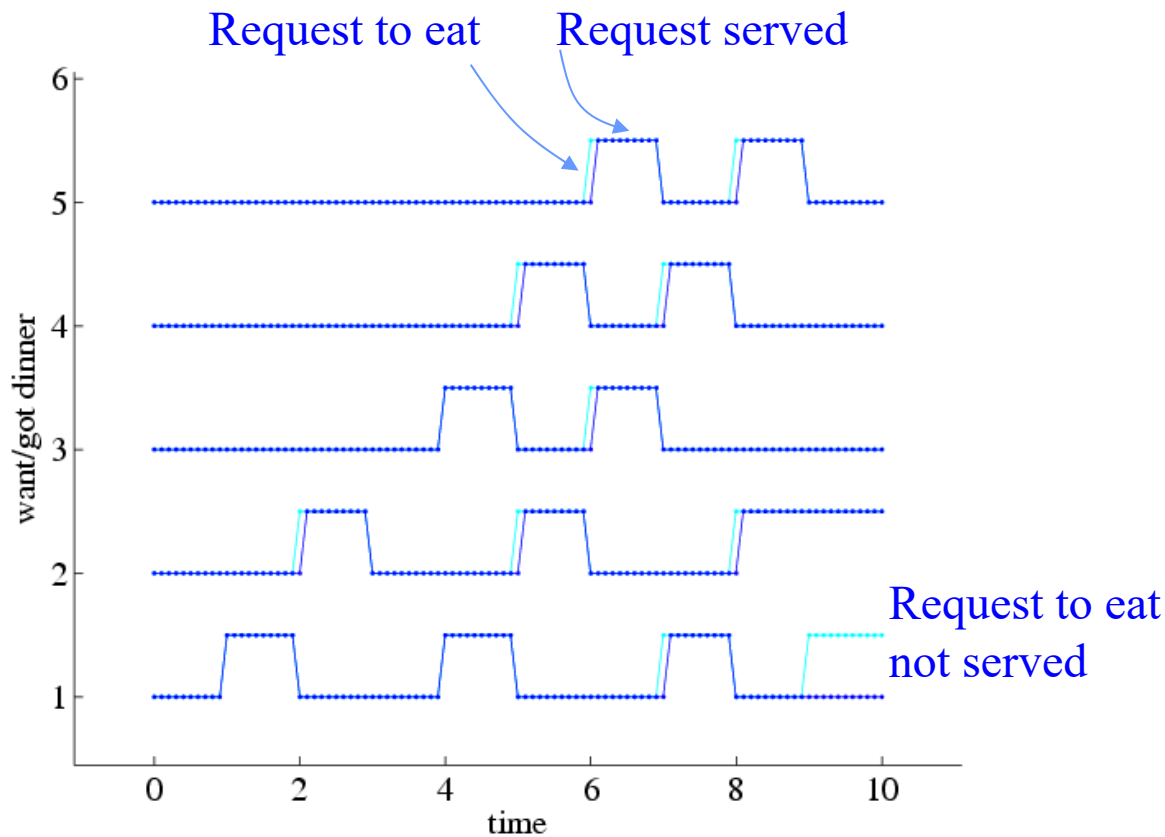

Note: See complete demo in the webpage of the course.

Note2: Modern operating systems must work better than failing early like in this PN simulation. E.g. two programs requiring simultaneously much CPU and memory, the O.S. has managers that hold the resources (CPU, memory, etc), queue the requests and in most cases even preempt the resources (CPU).

```
function [tSav, MPSav, youtSav]= PN_sim(Pre, Post, M0, ti_tf)
%
% Simulating a Petri net, using a SFC/Grafcet simulation methodology.
% See book "Automating Manufacturing Systems", by Hugh Jack, 2008
% (ch20. Sequential Function Charts)
%
% Petri net model:
%  $M(k+1) = M(k) + (Post-Pre)*q(k)$ 
% Pre and Post are NxM matrices, meaning N places and M transitions

% 0. Start PN at state M0
%
MP=M0;
ti=ti_tf(1); tf=ti_tf(2); tSav= (ti:5e-3:tf)';
MPSav= zeros( length(tSav), length(MP) );
youtSav= zeros( length(tSav), length(PN_s2yout(MP)) );

for i= 1:length(tSav)

    % 1. Check transitions (update state)
    tm= tSav(i);
    qk= PN_tfire(MP, tm);
    qk2= filter_possible_firings(MP, Pre, qk(:));
    MP= MP +(Post-Pre)*qk2;

    % 2. Do place activities
    yout= PN_s2yout(MP);

    % Log all results
    MPSav(i,:)= MP';
    qkSav(i,:)= qk2';
    youtSav(i,:)= yout;

end
```

Running a generic Petri net



```
function qk2= filter_possible_firings(M0, Pre, qk)
% verify  $Pre*q \leq M$ 
% try to fire all qk entries

M= M0;
mask= zeros(size(qk));
for i=1:length(qk)
    % try accepting qk(i)
    mask(i)= 1;
    if any(Pre*(mask.*qk) > M)
        % exceeds available markings
        mask(i)= 0;
    end
end
qk2= mask.*qk;
```

Example 2: Keyboard Reading

output = columns power

input = lines read

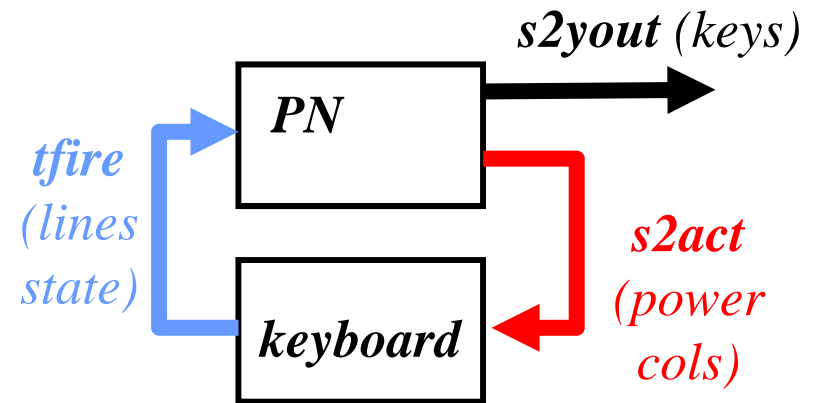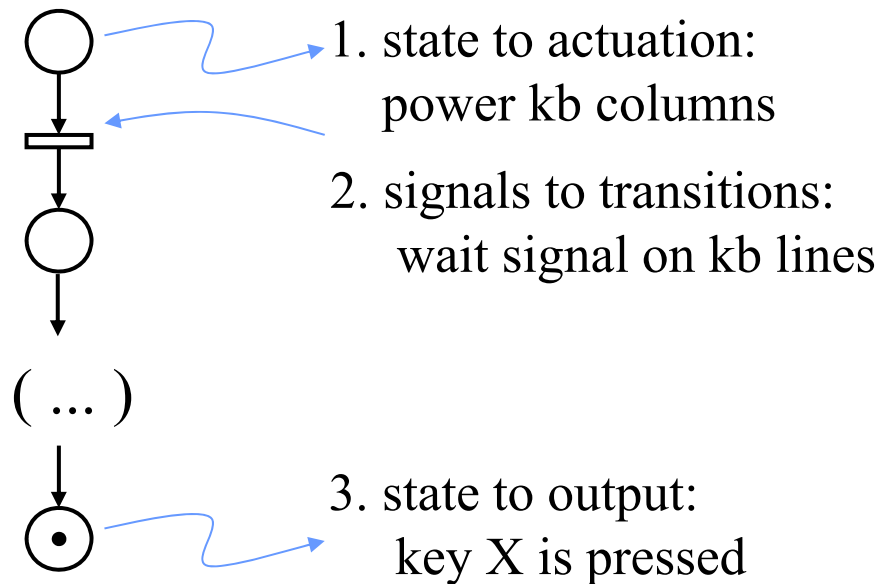

Code template (Matlab):

Main systems

a) PN_sim.m

b) PN_device_kb_IO.m

Interface functions

1) PN_s2act.m

2) PN_tfire.m

3) PN_s2yout.m

```
function lines= PN_device_kb_IO(act, t)

% Define 4x3-keyboard output line-values given actuation on the 3 columns
% and an (internal) time table of keys pressed
% Input:
% act: 1x3 : column actuation values
% t : 1x1 : time
% Output:
% lines: 1x4 : line outputs

global keys_pressed
if isempty(keys_pressed)
    % first column = time in seconds
    % next 12 columns = keys pressed at time t
    keys_pressed= [...
        0 mk_keys([]) ; 1 mk_keys(1) ; ...
        2 mk_keys([]) ; 3 mk_keys(5) ; ...
        4 mk_keys([]) ; 5 mk_keys(9) ; ...
        6 mk_keys([]) ; 7 mk_keys([1 12]) ; ...
        8 mk_keys(12) ; 9 mk_keys([]) ; ...
    ];
end

% pressed keys yes/no
ind= find(t>=keys_pressed(:,1));
if isempty(ind)
    lines= [0 0 0 0]; % default lines output for t < 0
    return
end
keys_t= keys_pressed(ind(end), :);

% if actuated column and key pressed match, than activate line
lines= sum( repmat(act>0, 4,1) & reshape(keys_t(2:end), 3,4)', 2);
lines= (lines > 0)';
```

Keyboard simulator:
generate line values
given column values

```
function y= mk_keys(kid)
y= zeros(1,12);
for i=1:length(kid)
    y(kid(i))= 1;
end
```


Prototypes of the interfacing functions

The implementation of these functions is to be done by each group in the laboratory.

```
function act= PN_s2act(MP)

% Create 4x3-keyboard column actuation
%
% MP: 1xN : marked places (integer values >= 0)
% act: 1x3 : column actuation values (0 or 1 per entry)

function qk= PN_tfire(MP, t)


% Possible-to-fire transitions given PN state (MP) and the time t
%
% MP: 1xN : marked places (integer values >= 0)
% t : 1x1 : time
% qk: 1xM : possible firing vector (to be filtered later with enabled
%           transitions)

function yout= PN_s2yout(MP)


% Show the detected/undetected key(s) given the Petri state
%
% MP: 1xN : marked places (integer values >= 0)
```

Laboratory assignment: detect keys pressed by the user and just accept those keys when there are not multiple keys pressed at the same time.



Keys pressed

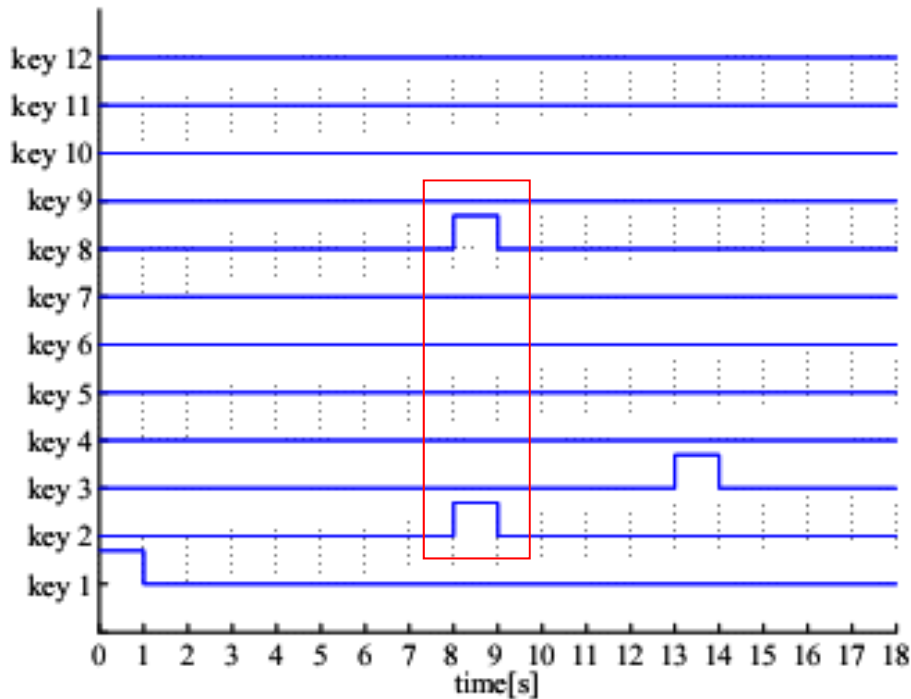


Keys accepted

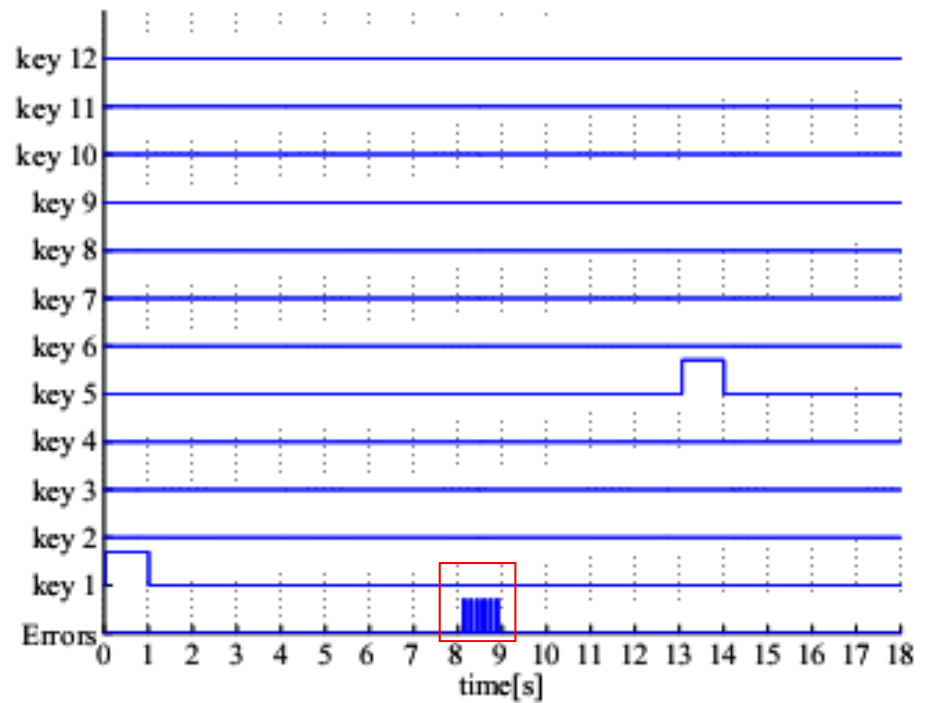

Example 3: Busy Beaver FSM as PN

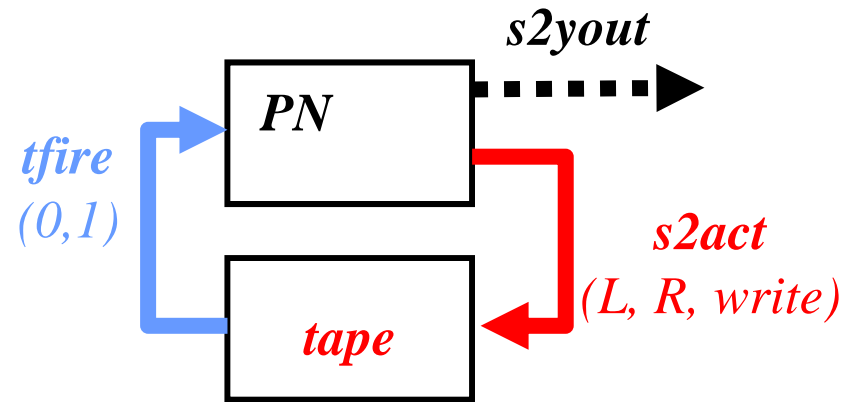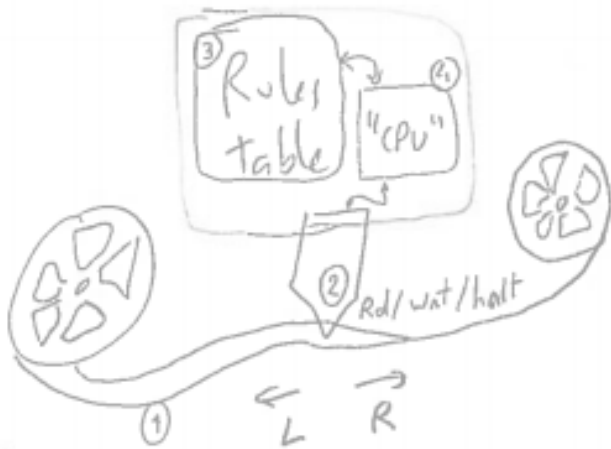

outputs = tape left, right, write
input = tape read (one bit, i.e. 0 or 1)

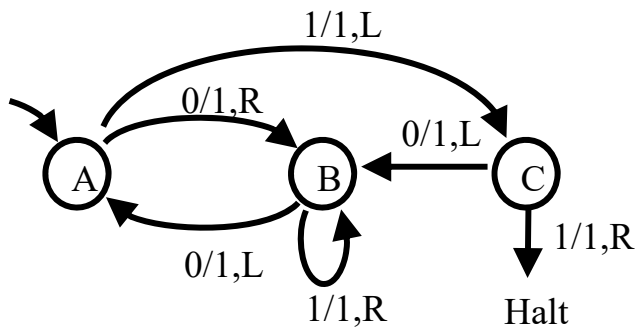

Code template (Matlab):

Main systems

- a) PN_sim.m (as before)
- b) **TM_tape.m** (see Turing)


Interface functions

- 1) PN_s2act.m
- 2) PN_tfire.m
- 3) PN_s2yout.m

Turing machine, Busy-Beaver 3states 2symbols,
graph vs table, see input / output :

outputs = tape left, right, write (1)

input = tape read (one bit, i.e. 0 or 1)

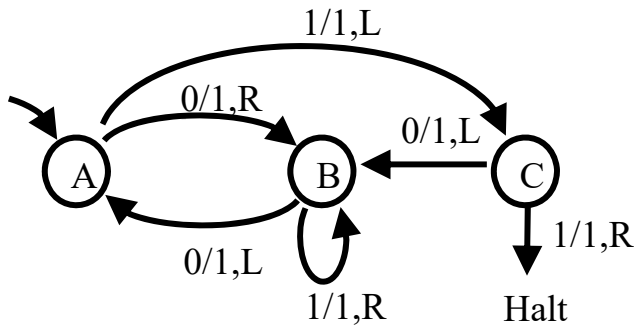

Current state	Input	Action R/W	Action L/R/N	Next state
A	0	write 1	right	B
A	1	write 1	left	C
B	0	write 1	left	A
B	1	write 1	right	B
C	0	write 1	left	B
C	1	write 1	null	halt

Turing-Machine Busy-Beaver:
 PN shown in previous slide,
 here implement **Input / Output**


```
% TM_tape.m : left, right, read, write
% at A,B,C, read bit & activate transitions
% at A0,B1 move right
% at A1,B0,C0 move left
```

```
function act= PN_s2act( MP )


act= TM_tape('read');

if max(MP([2 3 5 6 8 9]))>0
    TM_tape('write',1);
end

if MP(3)>0 || MP(5)>0 || MP(8)>0
    TM_tape('left');
elseif MP(2)>0 || MP(6)>0
    TM_tape('right')
else
    % do nothing
end
```

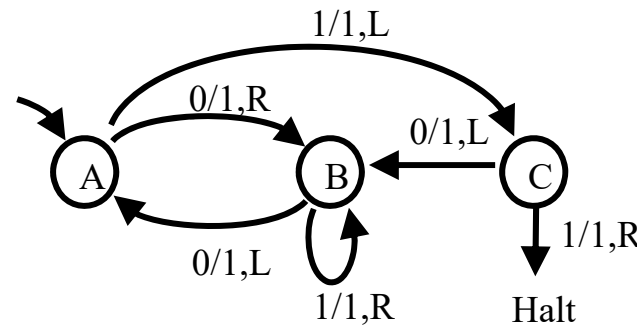

1	A	-
2	A0	1,R
3	A1	1,L
4	B	-
5	B0	1,L
6	B1	1,R
7	C	-
8	C0	1,L
9	C1	1,N
10	H	-

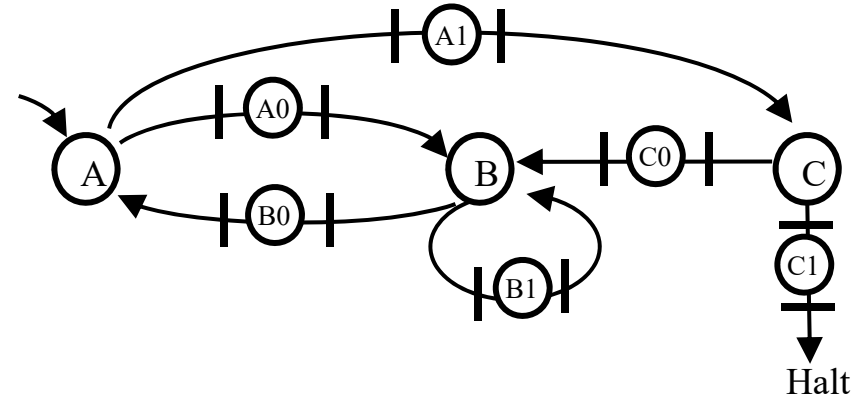


```
function qk= PN_tfire( act, t )

qk= ones(1,12);

if act % read 1 from tape
    qk([1 5 9])= 0;
    qk([3 7 11])= 1;
else
    qk([1 5 9])= 1;
    qk([3 7 11])= 0;
end
```

Turing Machine Busy Beaver: simulation results

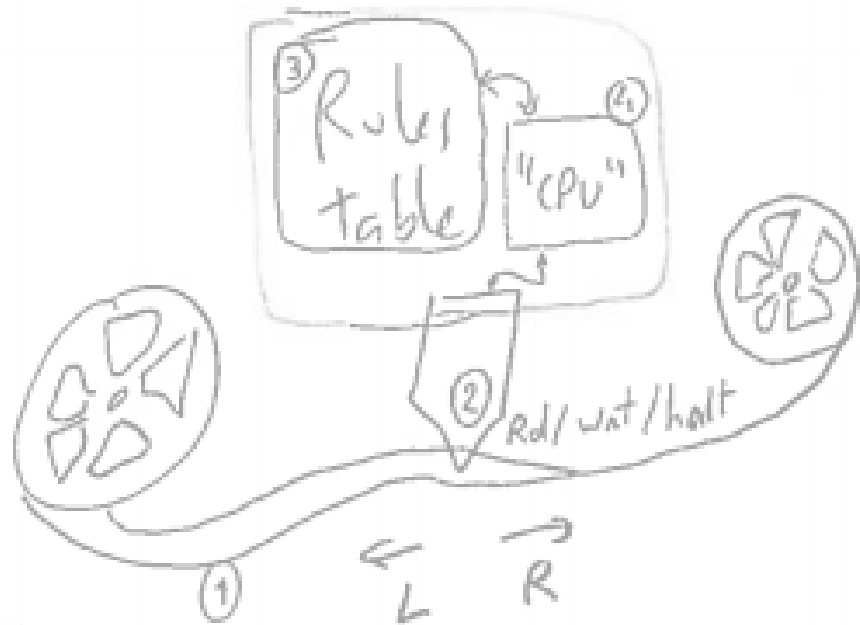

3-state Busy Beaver:

a0 -> b1r a1 -> h1r

b0 -> c0r b1 -> b1r

c0 -> c1l c1 -> a1l

halts after **21 time steps**

fills **6 ones**

